



## LLY T5



5000417 and 5000418

### APPLICATIONS

Office lighting  
Shop lighting

School lighting  
Industrial lighting



### DESCRIPTION

The LLY is a T5 surface mounted light fixture.

These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

High energy savings and a superior visual comfort.

Body is made of white painted (RAL 9003) metal sheet.

ALDP - double parabolic louvre category C2 of highly polished aluminium.

Version with emergency backup is available on request.

Temperature range: Ta = -5°C to +35°C

# LLY T5

## PRODUCT VARIATION

### Screen/lattice

AALDP - double parabolic louvre category C2 of highly polished aluminium.

### Electrical



Input: 220-230V / 50-60 Hz

High frequency ballast (HF).

Dimmable versions are available on request.

### Mounting

Surface mounted

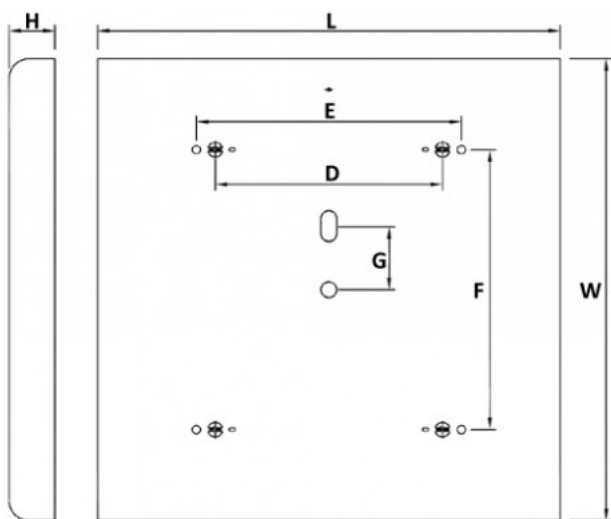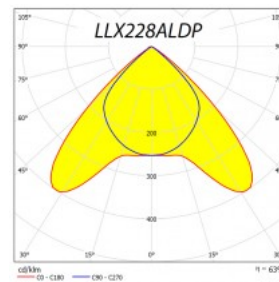

## PRODUCT TYPES

Item no.	Watt	Tube	L	W	H	D	E	F	G
5000417	2x14	T5	610	610	61	340	390	400	170
5000418	4x14	T5	610	610	61	300	350	370	84

Subject to technical changes, misprints and errors